


**PRODUCT SPECIFICATIONS**

Universal Vandal-Resistant 3000 Gal. Filtration Kit with Filter Status Monitor. Overall dimensions are 7-7/8" x 5-7/8" x 16-3/8". Made of Stainless Steel.

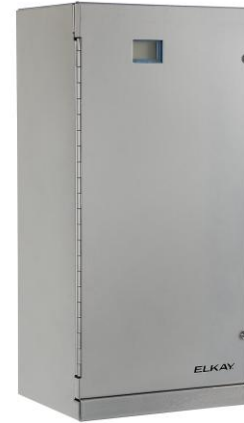

<b>Special Features:</b>	Vandal Resistant, Filtered, Visual Filter Monitor
<b>Material:</b>	Stainless Steel
<b>Finish:</b>	Stainless Steel (S)
<b>Dimensions:</b>	7-7/8" x 5-7/8" x 16-3/8"
<b>Shipping Weight:</b>	8 lbs.
<b>Flow Rate:</b>	1.5 GPM (5.6 L/m)
<b>Capacity:</b>	
<b>Temperature:</b>	40-100°F (4-38°C)
<b>Initial Pressure Drop:</b>	2-5 PSI (14-34 kPa)
<b>Maximum Pressure:</b>	105 PSI (724 kPa)
<b>Minimum Pressure:</b>	20 PSI (138 kPa)
<b>Water Inlet:</b>	3/8" (9.5mm) O.D. tube
<b>Water Outlet:</b>	1/4" (6.4mm) O.D. tube

**Special Note:** Includes WaterSentry Filter. Order 51300C as a replacement filter.

- Includes WaterSentry 3,000-gallon capacity filter
- 51300C filter is tested and certified to NSF 42 and 53 for the reduction of lead, Class 1 particulate and chlorine taste and odor
- Filter should be replaced every 3,000 gallons or 1 year after installation; replace sooner if unit is located in a high-traffic area in places such as schools and airports
- Vandal-resistant enclosure made from 20-gauge stainless steel to protect filter and discourage tampering; Torx bit included for added security
- Versatile mounting near accessible water line; box includes conduit punchouts on sides and bottom and an open back for thru-wall plumbing; vandal-resistant conduit not provided
- Universal box works with Elkay® and non-Elkay units to turn any non-filtered cooler or fountain into a filtered unit


**Included with Product:** WaterSentry Filter, Filter Status Monitor, 20-Gauge stainless steel mounting box

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

**Product Compliance:** NSF 61 (Q≤1)  
NSF 372 (lead free)  
NSF 42  
NSF 53  
NSF 401



[Installation Instructions \(PDF\) - 2000001249](#)  
[Warranty \(PDF\)](#)

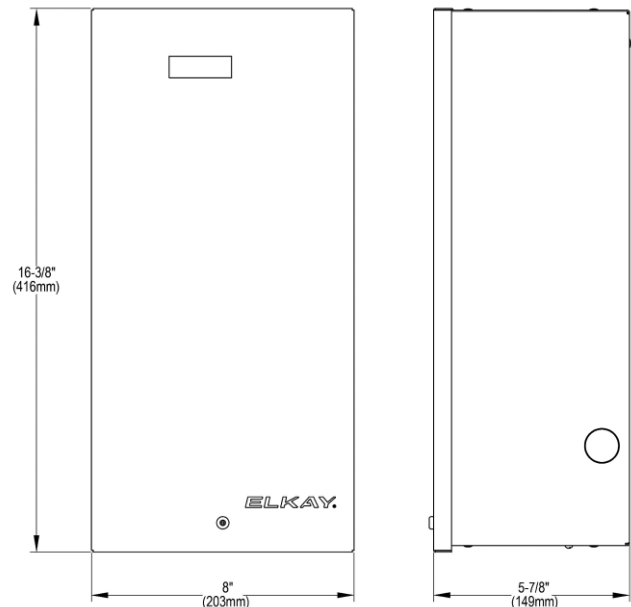

PART: \_\_\_\_\_ QTY: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 CONTACT: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 NOTES: \_\_\_\_\_  
 APPROVAL: \_\_\_\_\_

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*